

Analogue KNZD-63 Clean Room Phone



DESCRIPTION ITEM NO.:ZD0630012

1. Plastic material body for easy Installation.
2. Waterproof rating IP55 dust proof.
3. Full keypad with memory, 10 button programmable speed-dial telephone.
4. Weather resistant to IP55 standard, service temperature range from -30 degree to +75 degree.
5. Lightning protection to ITU-T recommendation K.21.
6. Flat keypad keep waterproof and dusty proof.
7. Phone integrity wiring to enable the telephone system to check if the telephone unit is still Operational. (If PABX have this available we can provide this function).
8. Auto release the line if the other side end call. This function upon buyer's requirement).
9. Can wipe with IPA, medicinal liquid.
10. Telephone line powered.
11. Application: Clean room, pharmaceutical factory, hospital, chemical plant etc.



PT. Deline Komunikasi Indonesia


Jalan Raya Duri Kosambi No.103
Duri Kosambi, Cengkareng, Jakarta Barat 11750
☎ 021-5417446 ✉ dki@delinekomindo.co.id



SPECIFICATION

1. PSTN analogue telephone
2. DTMF dialing
3. MTBF:100000hours
4. MTTR: 2 hours
5. Connection: RJ11 screw terminal pair cable
6. Applicable for various types of SPC exchange PABX and dispatching exchange system with feeding voltage of 33-60V.
7. Ambient temperature:-30 ~ +60 degree. Relative humidity:10%~95%
Atmospheric pressure: 86~106Kpa Circumstance noise:less than 60dB(A)
8. Sound level of ringing:over 70dB(A).
9. Standard frequency:low frequency group:697. 770. 852. 941Hz,
high frequency group:1209. 1336. 1477Hz, frequency deviation:-1.5% ~ +1.5%
10. Call transmission index:(5KM)SLR<12,RLR<-1,STMR>10, output impedance is 600 Ohm.
maximum distance: 7KM
10. Super strong function is available for dialing 3 groups of numbers stored in the memory
(maximum length of each number is 16 digits)
11. Connection: RJ11 screw terminal pair cable (or RJ11 Socket of plug upon request)
with stainless steel cable protected

INSTALLATION

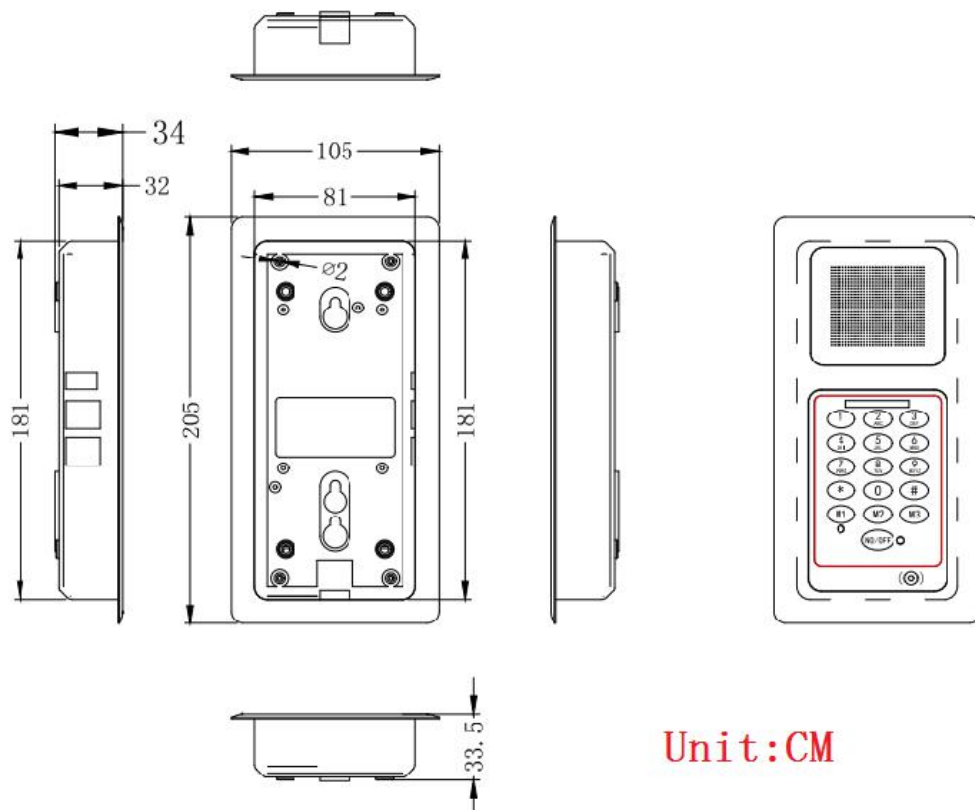

PT. Deline Komunikasi Indonesia

Jalan Raya Duri Kosambi No.103
Duri Kosambi, Cengkareng, Jakarta Barat 11750
☎ 021-5417446 ✉ dki@delinekomindo.co.id

CERTIFICATION

EN55022: emissions

Ingress Protection: GB4208-93 IP66 FCC

EMC: EN50121(Railway application-Electromagnetic Compatibility)

EN55024: immunity

ITU-T Recommendations K21



RoHS

PACKING



Unit size:105*205*32mm Unit: N.W:0.3KG

1pcs packing box size: 33*14*9mm Unit: N.W:0.3KG Unit G.W:0.58KG

5pcs in 1 outer Carton box: size: 340*310*150mm N.W:1.5KG G.W:1.98KG



PT. Deline Komunikasi Indonesia

Jalan Raya Duri Kosambi No.103
Duri Kosambi, Cengkareng, Jakarta Barat 11750
☎ 021-5417446 ✉ dki@delinekomindo.co.id




Hospital Intercom System

◆ Medical intercom

Main Funtion

- *Instant voice intercom
- *Paging and notification
- *Ip pbx unified management

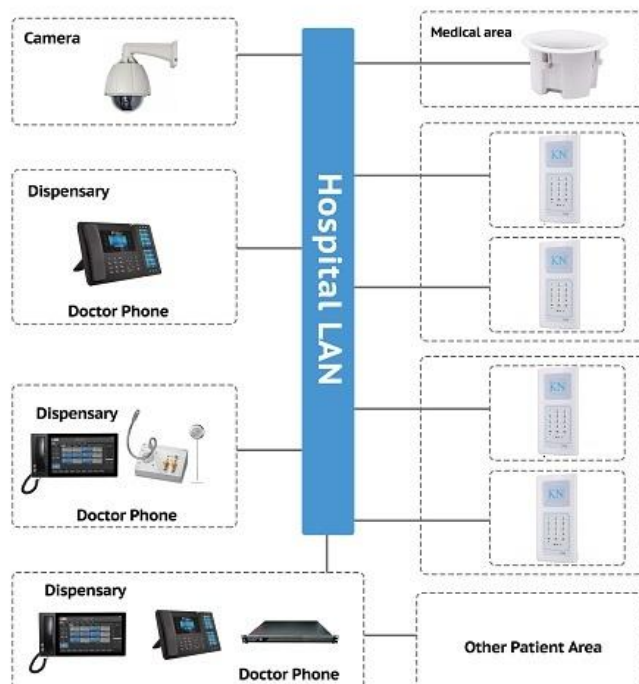



PT. Deline Komunikasi Indonesia

Jalan Raya Duri Kosambi No.103
Duri Kosambi, Cengkareng, Jakarta Barat 11750
© 021-5417446 ✉ dki@delinekomindo.co.id



HONGKONG KOON TECHNOLOGY LTD

TEL:0086755 29790158/27448753 Fax:0086755 29790278
Email:marketing@koontech.com www.koontech.com

VoIP Cleanroom Telephone



DESCRIPTION ITEM NO.ZD0630022

1. Plastic material body for easy Installation.
2. Waterproof rating IP55 dust proof.
3. Full keypad with memory, 10 button programmable free-dial telephone.
4. Hands-free button, 3w loudspeaker.
5. Lightning protection to ITU-T recommendation K.21.
6. POE power supply or DC12v.
7. Temperature range from -40 degree to +70 degree.
8. Support echo cancellation.
9. Remote software upgrade, configuration and monitoring.
10. Optional 7 minute time out to release the line if the other side hang up. This function upon buyer's requirement).
11. Can wipe with IPA.
12. Application: Clean room, pharmaceutical factory, hospital, chemical plant etc.



PT. Deline Komunikasi Indonesia

Jalan Raya Duri Kosambi No.103
Duri Kosambi, Cengkareng, Jakarta Barat 11750
☎ 021-5417446 ✉ dki@delinekomindo.co.id




SPECIFICATION

VoIP SIP2.0 telephone DTMF dialing
 MTBF:100000hours MTTR: 2 hours
 Free dial(maximum length of each number is 16 digits)
 Communication: Full duplex 2-way hands-free communication
 Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF)
 Power:Power over Ethernet, IEEE802.3af, Class 0
 Local power, 12VDC,Idle 2W, Max 10W
 Auxiliary Contacts:1 Aux Output, dry contact
 Contact Ratings. Load: Resistive load
 Rated load:0.3 A at 125 VAC; 1 A at 30 VDC
 Rated carry current:1A
 Max.switching voltage:125 VAC,60VDC
 Max.switching current:1A

Audio Codes:G.711, G.722, G.729
 Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better
 IP Protocols:IPv4, TCP, UDP, TFTP, RTP, RTCP, DHCP, SIP
 LAN Protocols:Power over Ethernet(PoE,802.3af), WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)
 Programming:Non-volatile flash memory programming and configuration through Web GUI
 Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring, status LED
 Echo cancellation code:G.167/G.168

INSTALLATION

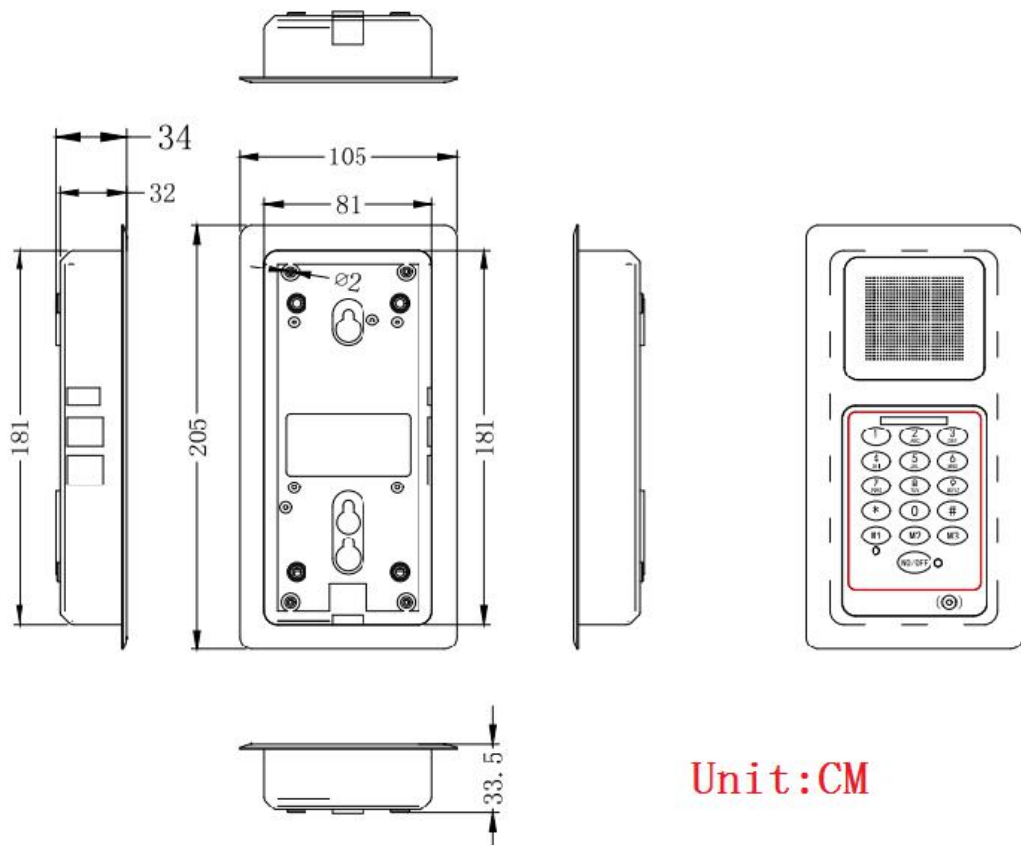

CERTIFICATION

RCM: AS/NZS CISPR 32 Australian communications:AS/CAS004
 Australian Equipment-safety: AS/NZS 60950.1:2015
 EMC: EN50121(Railway application-Electromagnetic Compatibility)



PACKING



Unit size: 105*205*32mm Unit: N.W:0.3KG

1pcs packing box size: 33*14*9mm Unit: N.W:0.3KG Unit G.W:0.58KG

5pcs in 1 outer Carton box: size: 340*310*150mm N.W:1.5KG G.W:1.98KG




Hospital Intercom System

◆ Medical intercom

Main Function

- *Instant voice intercom
- *Paging and notification
- *Ip pbx unified management

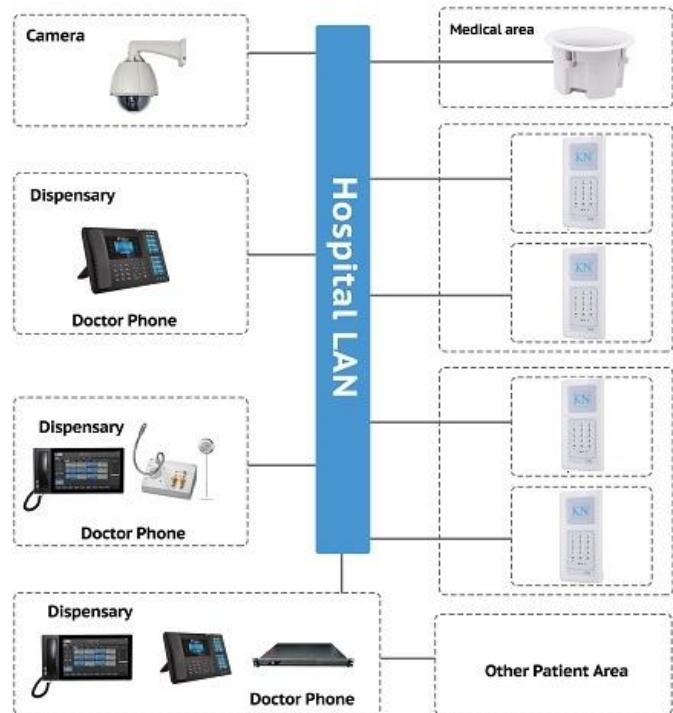

PT. Deline Komunikasi Indonesia

Jalan Raya Duri Kosambi No.103
Duri Kosambi, Cengkareng, Jakarta Barat 11750
☎ 021-5417446 ✉ dki@delinekomindo.co.id



HONGKONG KOON TECHNOLOGY LTD

TEL:0086755 29790158/27448753 Fax:0086755 29790278
Email:marketing@koontech.com www.koontech.com

